


Workplace Solutions



P.O. Box 26 • 600 South Clark St.
Mayville, WI 53050
Phone: 920-387-5195

For use on Wire Rope
● from 3/16" (5mm)
● thru 3/8" (9mm) O.D.


For Flat Cable to 2.1" wide

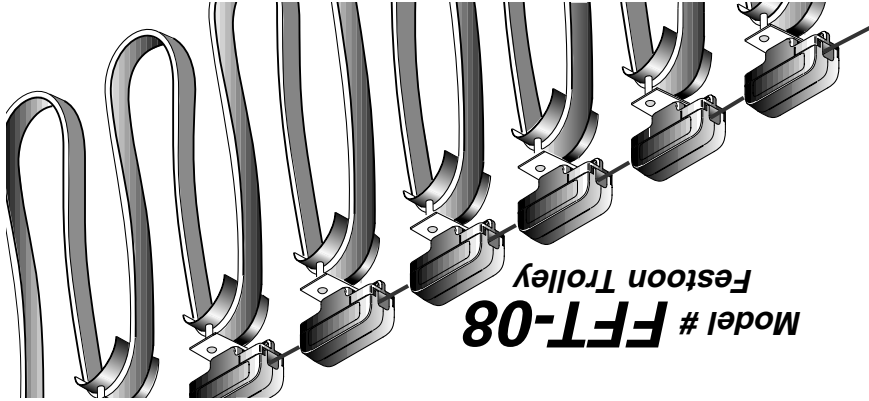

Model # **FFT-08**
Festoon Trolley

Contents: One model
FFT-08

Trolley for flat cable to 2.1" wide
Quickly and easily provide festoon systems for
multiple conductor flat cables.

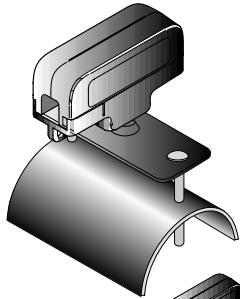


8 MODELS AVAILABLE

- | | | | | | | |
|---|---|---|--|--|---|--|
| | | | | | | |
| #WRS-01
Trolley
with tool
hook | #WRS-02
Trolley with
tool hook
and hose
connector | #FRT-04
Trolley for
round cable
or hose, 0.3"
to 0.6" OD. | #FRT-24
Trolley for
two round
cables or
hoses, 0.3"
to 0.6" OD. | #FRT-05
Trolley for
round cable
or hose, 0.6"
to 0.94" OD. | #FRT-25
Trolley for
two round
cables or
hoses, 0.6"
to 0.94" OD. | #FRT-06
Trolley for
round cable
or hose,
0.95" to
1.25" OD. |

Products to make your workplace more efficient and safe.
Ask for FREE CATALOG.

• TROLLEY INSTALLATION •

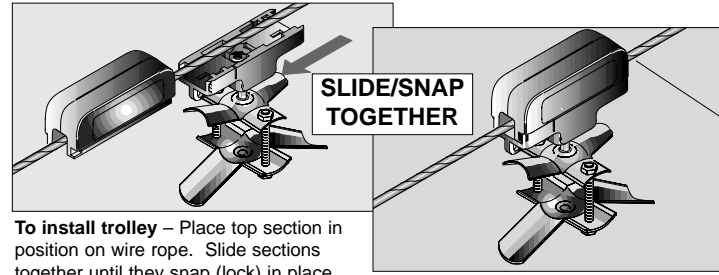


SLIDE/SNAP
TOGETHER

Trolleys fit wire rope
up to and including
0.375" (9mm) O.D.

To install trolley – Place top section in
position on wire rope. Slide sections
together until they snap (lock) in place.


NOTE: Sections may be assembled in only one way. Slide "un-blocked" end
into "un-blocked" end. Do not force.

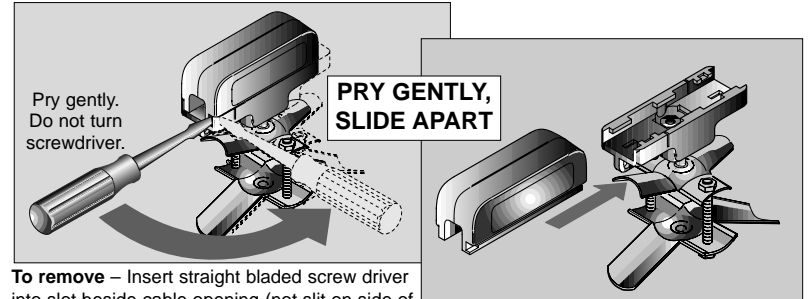

Pry gently.
Do not turn
screwdriver.

PRY GENTLY,
SLIDE APART

To remove – Insert straight bladed screw driver
into slot beside cable opening (not slit on side of
trolley) and pry gently as shown above. Do not turn screwdriver. Slide Apart

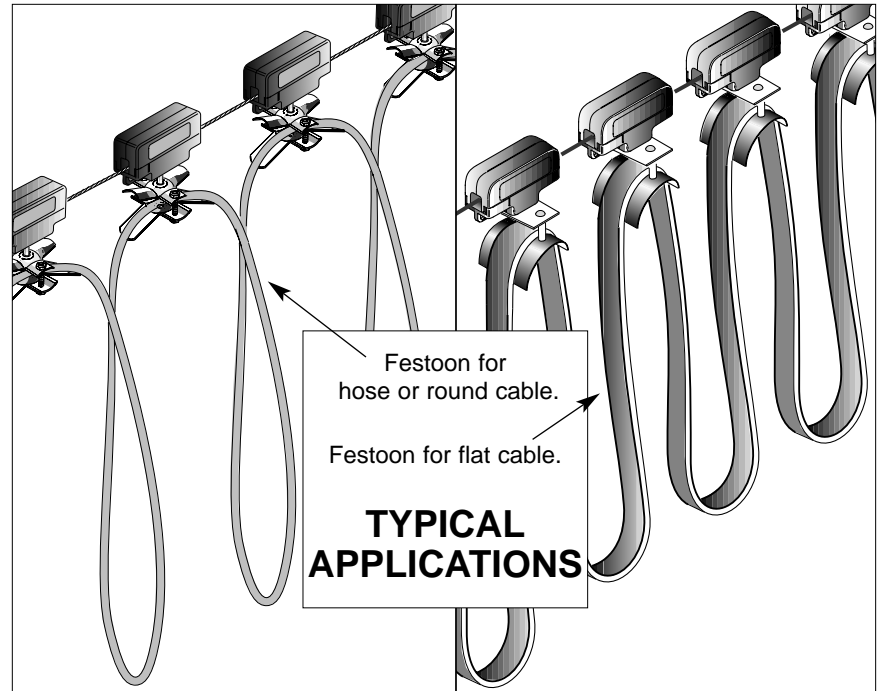

Festoon for
hose or round cable.

Festoon for flat cable.

**TYPICAL
APPLICATIONS**